

FEATURES

Capacity

- 2,640 / 3,300lbs

Weight

- with battery
4,620 / 5,742 lbs

Travel Speed

- 4.3 / 4.3 mph

Battery

- 24V / 320AH

Tires/Wheels

- Front: Pneumatic
- Back: polyurethane
- Vertical drive wheel offers easy maintenance

Powertrain/Electrical

- AC Drive Motor / DC Hydraulic Lifting Motor
- Quality German engineered drive axle
- Less heat production
- Side unload battery for battery removal / exchange
- Emergency power cut off
- Rear wheel drive
- Easily maintained controller and steering potentiometer
- Standard headlight, brake & turn signals, and strobe light

Controls

- ZAPI fully programmable control system
- Hydraulic Steering
- Control lever position is ergonomically designed to reduce driver fatigue
- Low & high gear ratios for grade vs. level applications
- High performance multi-function instrumentation with LED light and display functions
- Back-up alarm
- Integrated light switch and forward/reverse shifter
- Parking brake



The FBT10 and FBT15 Mini will revolutionize your factory, warehouse or indoor worksite with the ability to go from one end of your facility to the other, and deliver materials right to the production line or workstation, without weight, height or width restrictions.

FBT10-MINI



Frame

- A wider German engineered mast, allowing for better visibility
- Length 100.8" / 104.7"
- Width 39.3" / 39.3"
- Height 80.0" / 80.0"
- Turning radius 51.2" / 55.1"
- Easily accessible cab
- Adjustable steering wheel and seat
- Overhead guard
- Seatbelt
- Excellent ramp/grade performance
- Low center of gravity offers increased stability

Options

- Customizable fork lengths and widths
- Lifting heights
- Up to 196" lift
- Truckers mast available
- Side shift optional

Other

- Meets or exceeds ANSI B56.1 and CAN/CSA B335 Standards

While the FBT 15 has a wider wheel base (to manage the higher lifting capacities) the FBT 10 features the same wheel base as the original Mini. Lifting motor power has also been increased in both the FBT 10 & 15, while travel speed has increased as well from the original Mini's 4.0 to 4.3 MPH.


The overall dimensions of the FBT10 & 15 extend beyond the original Mini's spec's, but the units are still much smaller and more maneuverable than other electric forklifts which offer a similar lifting capacity.



			FBT10-MINI	FBT15-MINI
Characteristics	Load capacity	(Q) LBS	2640	3300
	Drive / Operation type	Type	Rear Wheel Drive/Seated	Rear Wheel Drive/Seated
	Load centre distance	(c) IN	24	24
	Wheel number, front/rear (x = driving wheel)	#	2/1x	2/1x
	Tread, front	(b10) IN	34.7	34.7
	Tread, rear	(b11) IN	0.0	0.0
	Wheels	Front Type	pneumatic	pneumatic
	Wheels	Rear Type	solid	solid
	Wheel dimension, front		15 x 4.5-8	16x6-8
	Wheel dimension, rear		280x100/PU	280x100/PU
Dimensions	Wheelbase	(y) IN	42.5	49.2
	Max. lift height	(h3) IN	118.1 - 196.0	118.1 - 196.0
	Mast Height Lowered	(h10) IN	78.0	78.0
	Overhead guard height (cabin)	(h6) IN	78.0	78.0
	Seat/stand height	(h7) IN	34.6	34.6
	Ground Clearance	(h2) IN	2.8	2.8
	Overall length without forks	(m2) IN	64.6	68.5
	Overall width	(l2) IN	39.3	39.3
	Fork carriage width	(b1) IN	39.3	39.3
	Fork dimension	(b3) IN	1.4 x 3.9 x 36.2*	1.4 x 3.9 x 36.2*
	Aisle width, with pallet 39"x47" crosswise	(s/e/l) IN	117.3	121.3
	Aisle width, with pallet 32"x47" lengthwise	(Ast) IN	122.0	126.0
	Turning radius	(Ast) IN	51.2	55.1
	Battery weight	(Wa) IN	660	792
Battery dimensions	LBS	32.0 x 22.0 x 10.6	32.0 x 22.0 x 13.8	
Performance	Service weight (with battery)	LBS	4260	5742
	Traveling speed, laden/unladen	MPH	4.3 / 4.3	4.3 / 4.3
	Lifting speed, laden/unladen	IN/S	5.9 / 7.9	5.9 / 7.9
	Lowering speed, laden/ unladen	IN/S	7.9 / 15.7	7.9 / 15.7
	Max. gradeability, laden/unladen	%	10 / 12	10 / 12
Driving System	Battery voltage/rated capacity	v/Ah	24 / 320	24 / 320
	Driving motor power	HP	2.9	5.4
	Lifting motor power	HP	4.0	6.7
	Drive control	Type	AC	AC

Application:

Perfect for indoor applications where size matters; the Mini Forklift has an impressive turning radius and is also suitable for construction projects where a light-weight portable lift is required.

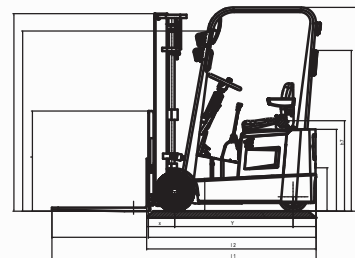

* Custom fork lengths and widths available.

** All factory specifications are subject to change without notice.

